


 \triangleright

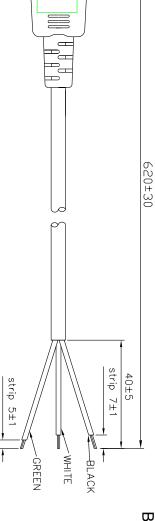

GENERAL SPECIFICATIONS:

RATING:

CABLE TYPE / SIZE:
TEMPERATURE RATING:
CONDUCTOR COLORS:
CABLE JACKET COLOR:
OVERALL LENGTH (L):
CABLE OUTER DIAMETER:
END 'A' PLUG;

10A / 125V AC SJT, # 18 AWG, 3 CONDUCTOR 105° C

BLACK / WHITE / GREEN BLACK 620 ± 30 mm (2 FT)

7.8 ± 0.1 mm IEC 320 / C14

SEE TERMINATION TABLE UL, CSA OR CUL

UL, CSA OR cUL

PACKING:

BULK PACKED, BUNDLES OF 25.

MAXIMUM SHIPPING CARTON WEIGHT IS 30 KG.

NOTES:

 CORD AND PLUG MUST BE MARKED WITH APPROVAL SYMBOLS AND/ OR FILE NUMBERS.







CONDUCTOR TERMINATION TABLE:

NEUTRAL

Wire

GROUND

APPROVALS PLUG: APPROVALS CABLE:

0-12-10		-	ָרָרָיִ.	
STRIPPED	7	40	<u> </u>	
				L
	_	40	≨ I	
Terminal	スフ±1mm	TCS+ 5 mm	Color	
		70		

DASH NO.

PART NO

REV.

TABULATION BLOCK

DESCRIPTION

*AS OF 10/01/04	Complies with Requirements of California PROPOSITION 65

NOTES

62F000	PART NO: 7051062F000	SCALE: NONE		APRVD: DMR DATE: 08/16/04	аррючан пот те сво от спортек те.	ble UL, CSA or EN Standards for proper installation instruction.	Ħ. ō
	MODEL: N/A	G, CC A MODEL: N/A		DRAWN: NF DATE: 08/16/04	en '',	۳	=
'H AMERIC	DWG TITLE: NORTH AMERICAN NON-DETACHABLE CORDSET	MILLIMETERS ANGULAK .xx +/- 0.3 +/- 1° .xxx +/013	DATE: 08/16/04	INIT.BY: DMR DATE: 08/16/0	Limitation of Use: Globtek product are not authorized for use as mission critical components in life support	Foot Note: Globtek Inc. will not be liable for the	
tek.com	www.globtek.com	.xx +/- 0.1 +/- 1 .xxx +/005		SHEET 1			
ek. Inc.	GlobTek, Inc.	TOLERANCES: DECIMALS ANGULAR		REV. B			