



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
H	-	B		ECR-05-005975	30-JUN-05	BM	JB
		C		ECR-10-019054	15SEP10	DP	MQW

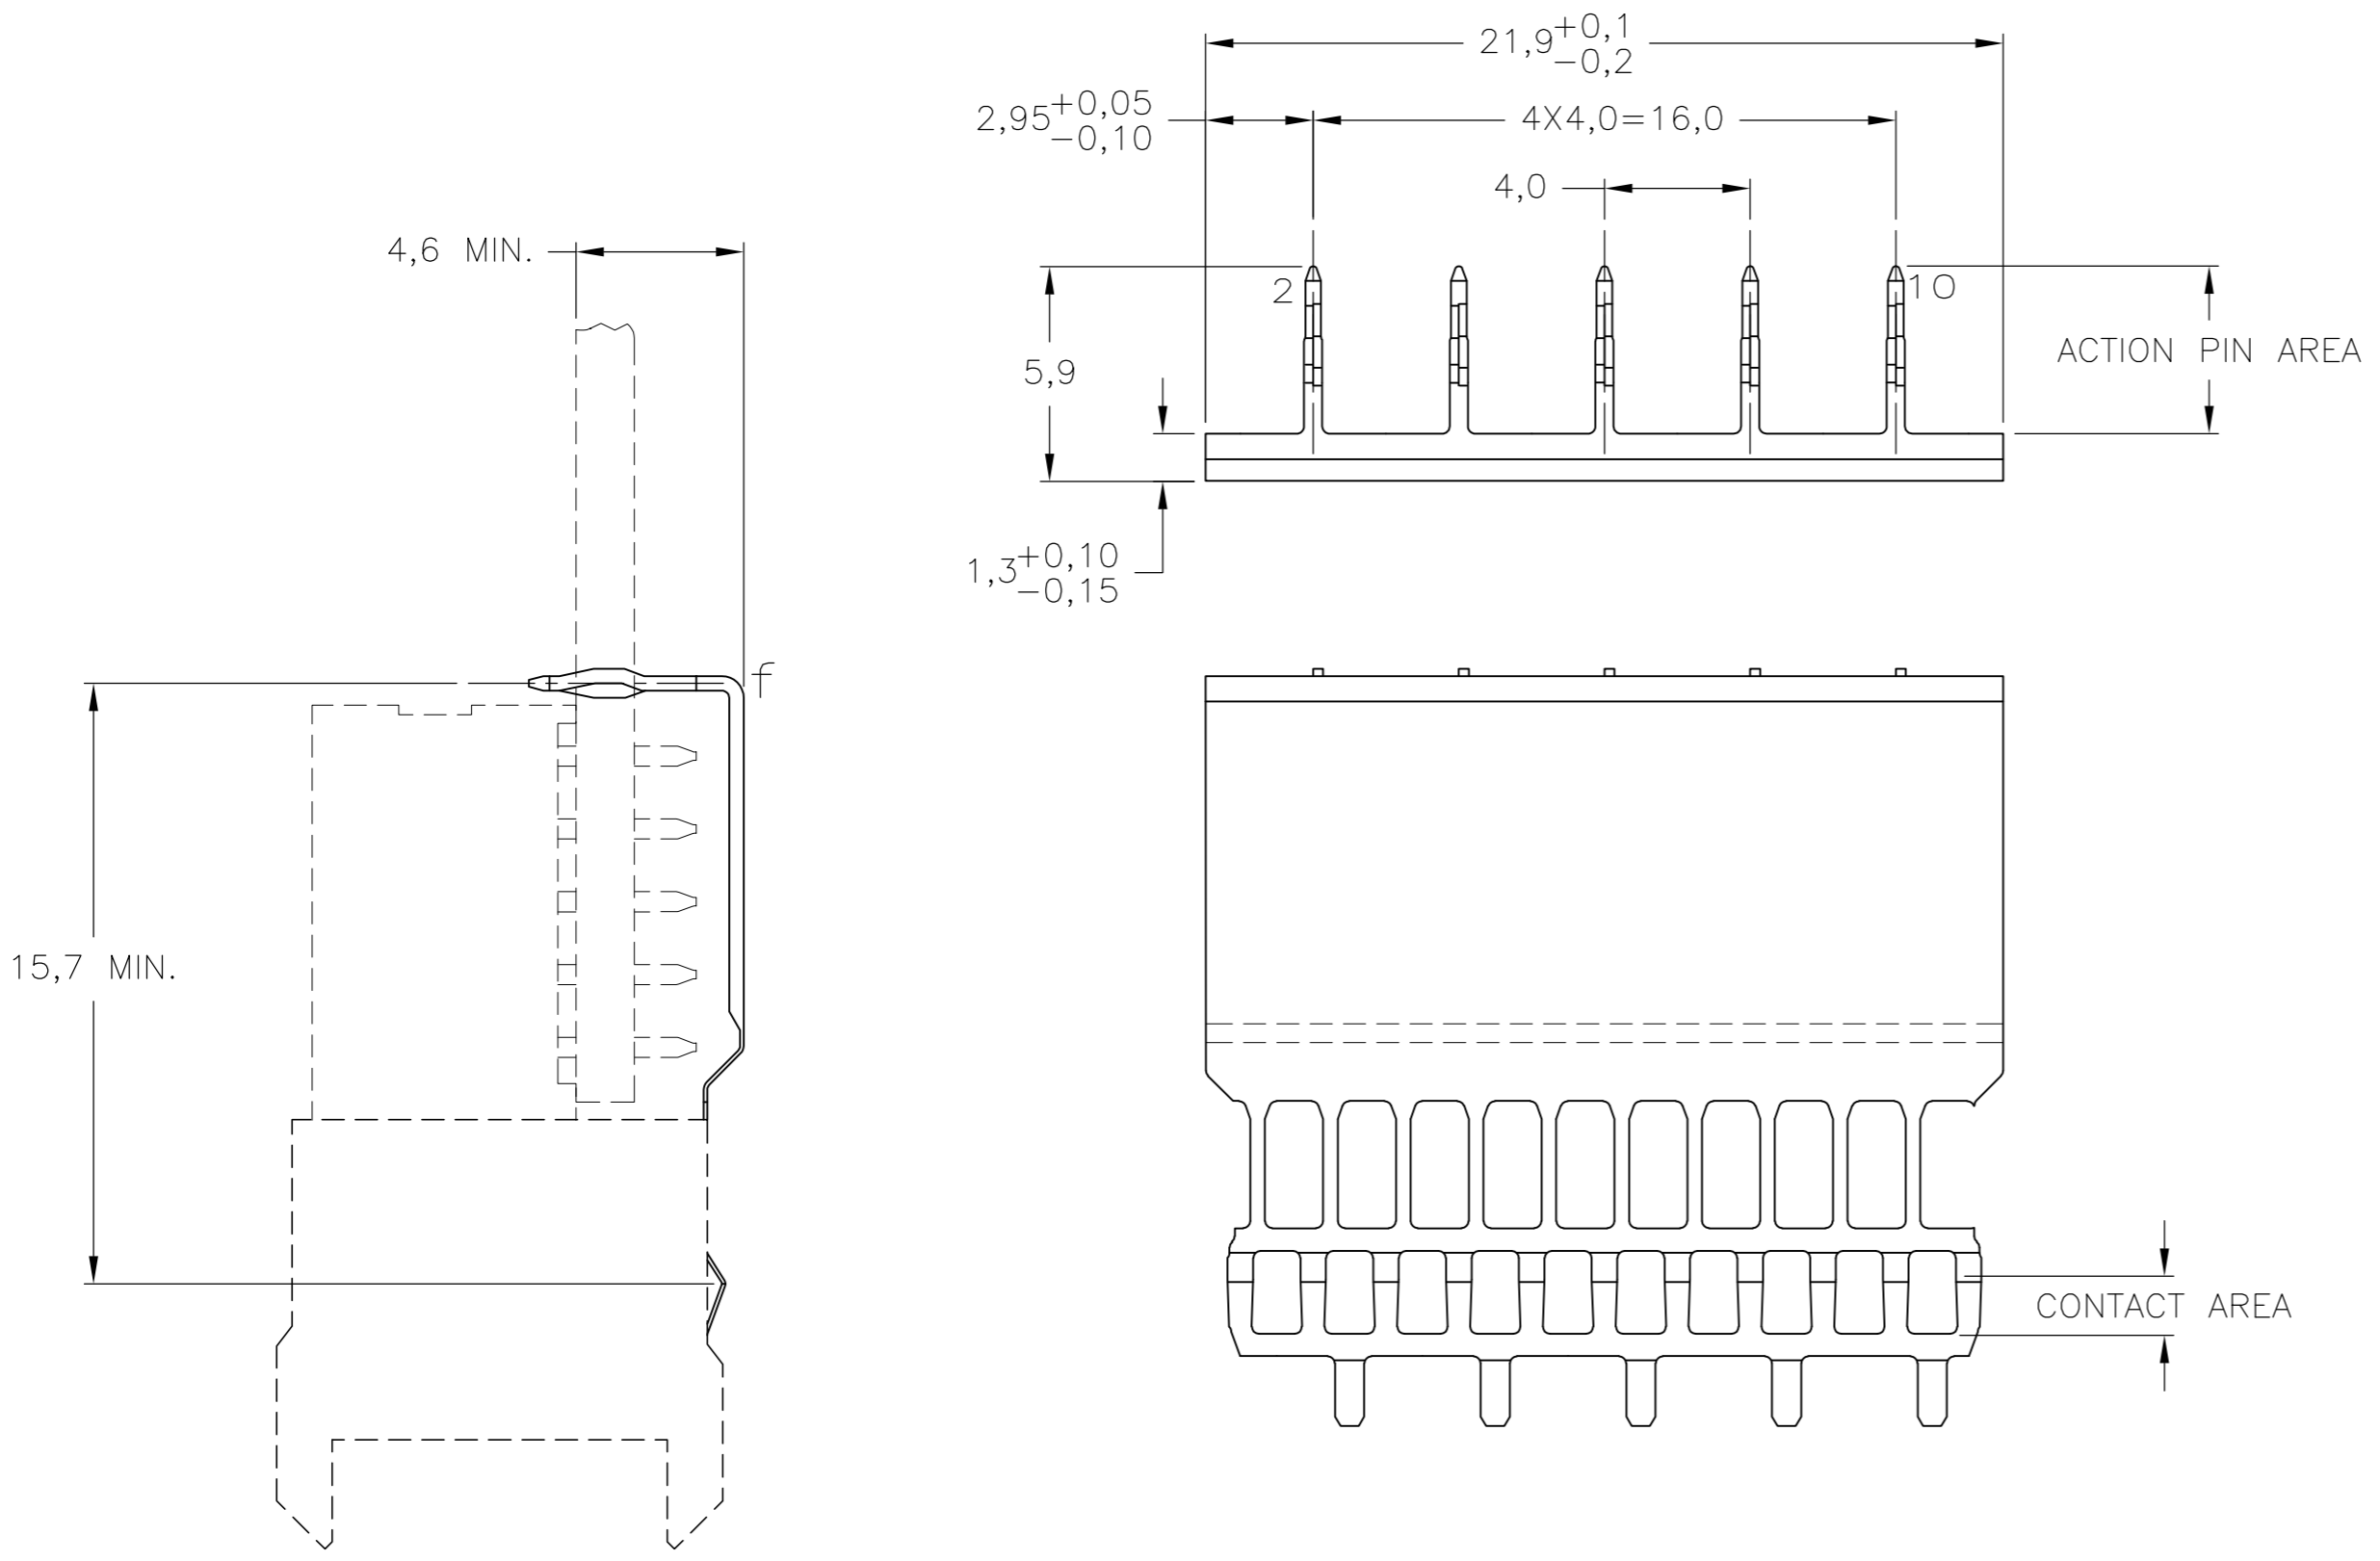

NOTES:

- ⚠ PLATING:
 CONTACT AREA: 0,76µm Au MIN. OVER 1,27µm Ni MIN.
 ACTION PIN : 0,5µm Sn MIN.
 REMAINDER : Ni
 - ⚠ MATERIAL; PHOSPHORBRONZE.
 - ⚠ ROW "f" 5 PLATED THROUGH HOLES FOR LOWERSHIELD.
 - ⚠ HOLE PATTERN FOR FEMALE CONNECTOR TYPE C WITH UPPERSHIELD, 55+6 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID.
 5 MAX. BOARD THICKNESS 3,5 mm.
 - ⚠ SHIELDS LUBRICATED WITH BELLCORE APPROVED LUBRICANT.
- TECHNICAL REF: TR-NWT-001217 ISSUE 1, SEPT. 1992.

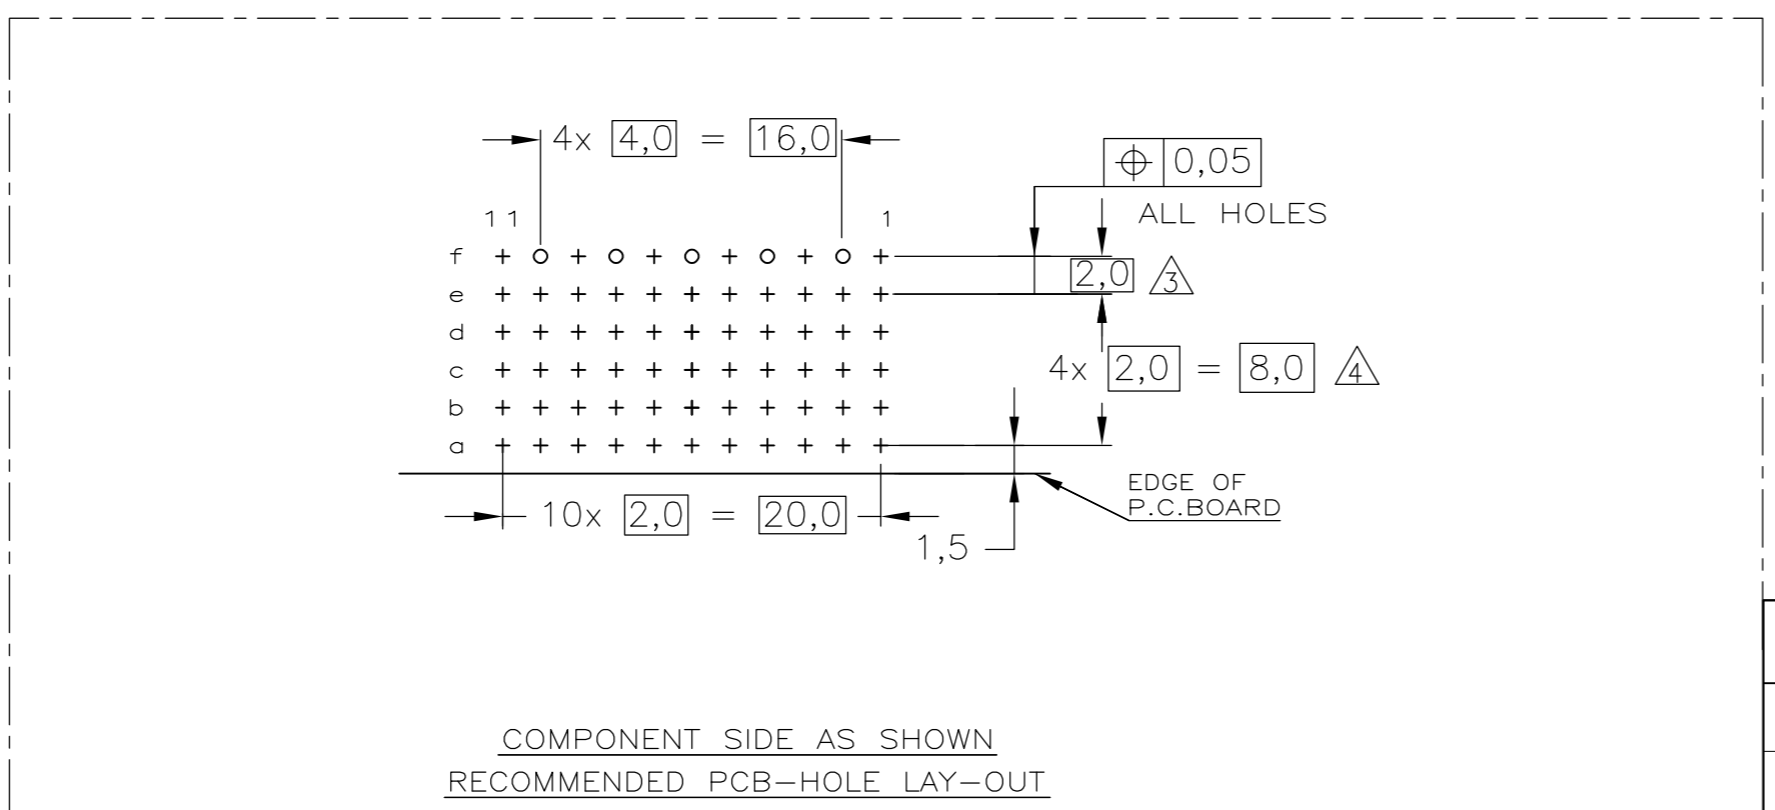

COMPONENT SIDE AS SHOWN
 RECOMMENDED PCB-HOLE LAY-OUT

P.C.B. HOLE DIM. ACTION PIN
 FOR DETAILS SEE
 APPLICATION SPECIFICATION

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K.N.KIRAN 18AUG04	Tyco Electronics Corporation 's-Hertogenbosch,5222AR-32	
DIMENSIONS: mm		CHK B.MOOIJ 25MAR05	NAME Z-PACK 2mm HM GROUND RETURN LOWER SHIELD TYPE C/M	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0-PLC ± - 1-PLC ± - ±0.2 2-PLC ± - 3-PLC ± - 4-PLC ± - ANGLES ± -		APVD B.MOOIJ 25MAR05	PRODUCT SPEC 108-19082	RESTRICTED TO -
MATERIAL -		FINISH -	APPLICATION SPEC 114-19029	SCALE 5:1
		WEIGHT -		SHEET 1 OF 1
		CUSTOMER DRAWING		REV C

5352112