


DETAIL "A"
CHAMFER
SCALE=12:1

UNCONTROLLED DOCUMENT

IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	57 Ω	140 Ω	308 Ω
Minimum	- Ω	112 Ω	- Ω

Z vs. FREQUENCY
(REF. ONLY)

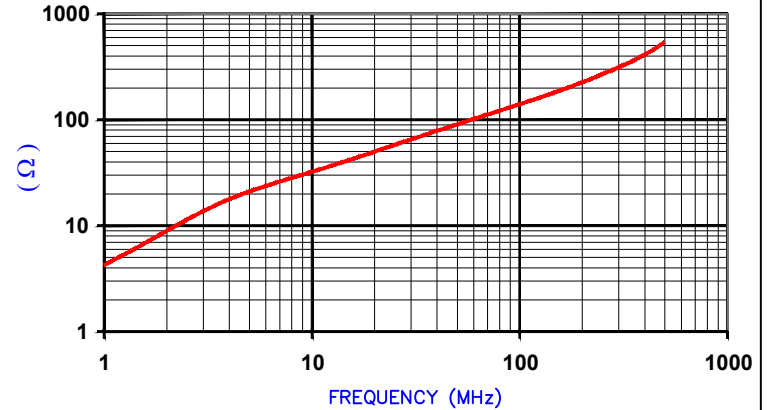

AGILENT E4991A Impedance/Material Analyzer
HP 16092A-Test Fixture TEST REF. 4481

FERRITE CORE DIMENSIONS (SPEC): mm [in]

A	19.20 [.756]	+ 0.29 [.011]
B	15.00 [.591]	+ 0.23 [.009]
C	16.00 [.630]	+ 0.32 [.013]
D	5.35 [.211]	+ 0.25 [.010]
		+ 0.25 [.010]
E	1.15 [.045]	- 0.15 [.006]

WEIGHT/1000 6.27 kgs [13.82 Lbs]

NOTES: UNLESS OTHERWISE SPECIFIED

1. COSMETIC SPECIFICATION REFER TO WI-QA-038.

SCALE DRAWING 1:1

28R0756-200



DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.		Laird	
E	UPDATE COMPANY LOGO	05/26/15	QIU	PROJECT/PART NUMBER:		REV	DRAWN BY:
D	UPDATE Z SPECS AND COMPANY LOGO	07/27/07	JRK	28R0756-200		E	TMB
C	UPDATE Z SPECS & ADD TEST REF. #	11/16/04	TMB	DATE:	10/18/02	SCALE:	3:1
B	CHANGE PRINT FORMAT CHANGE Z SPECS	02/17/03	TMB	CAD #	28R0756-200-E	TOOL #	R0756
A	ORIGINAL DRAFT	10/18/02	TMB			MATERIAL: FERRITE	
REV	DESCRIPTION	DATE	INT				